

With counting functions to ensure that all screws are tightened!

# Power supply with screw counter

The number of screws to be tightened can be set from 1 to 99, with the remaining number counted down after each screw is tightened.

## Main functions

### Buzzer to indicate screw tightening complete

A buzzer will sound when the final screw has been tightened to allow a check of complete screw tightening.

### Auto reset function

The count down number is automatically reset after all screws have been tightened so that work can start on the next job immediately. The screwdriver will not be operable until the "next work set" confirmation SET signal is input.

### Count timer function

Prevents confirmation tightening, supplemental tightening and secondary tightening from being counted.

### Normal power mode

In normal power mode the count function is disabled.

## Multi input (AC100V to 240V)

### BLOP-STC3 (BL-OPC screwdriver single power point)

The power supply has been made smaller and lighter than the previous model, with touch panel controls to prevent operating errors.




RoHS CE


Model		BLOP-STC3
Primary side	Power input	AC 100V-240V
	Fuse rating	3A / 250V(with spare fuses)
Power consumption (W)		75W output with DC31V input
Secondary side	Output voltage	HI: DC31V ± 5% (with overload protection)
		LOW: DC20V ± 5%
External dimensions (mm)		127 × 208 × 76(H)mm
Weight (kg)		1.8kg
Power cord length		1.8m
Accessories		8 crimp terminals

## Plug


### Type A-1 / 100V




### Type A-2 / 120V




### Type C / 220V-240V



### Type BF / 220V-240V



### Type S / 220V-240V



## AC100V Only

### VZOP-STC (VB-OPC screwdriver or VBH screwdriver single power point)




RoHS

Model		VZOP-STC
Primary side	Power input	AC100V ± 5% (50/60 Hz)
	Fuse rating	6A / 250V(with spare fuses)
Power consumption (W)		2W / load free
External dimensions (mm)		160 × 175 × 84(H) mm
Weight (kg)		1.5kg
Power cord length		1.8m
Accessories		8 crimp terminals, 1 minus screwdriver

## Part names and functions

### ● BLOP-STC3 (Front panel)

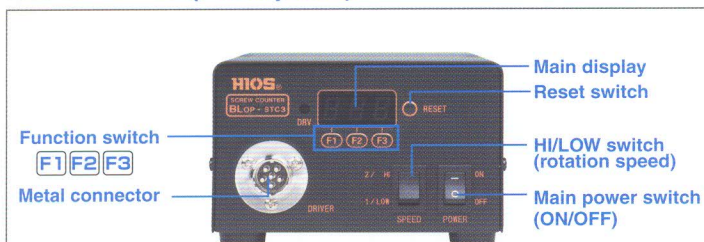

#### ■ Function (F1, F2, F3) operation mode, operation time, buzzer settings etc

	Set number of screws to be tightened (01 to 99) COUNT NUMBER	Set the number of screws to be tightened
	Set count timer (.00 to 0.99 seconds) COUNT TIMER (CN-T)	Setting to prevent counting of secondary tightening operations
F1	Set work set timer (0.0 to 3.9 seconds) WORK SET TIMER (WS-T)	Time until the screwdriver is operational
	Set work reset timer (0.0 to 3.9 seconds) WORK RESET TIMER (WR-T)	Time until the screwdriver becomes not operational
	Set reverse count timer (0.1 to 1.0 seconds) REVERSE COUNT TIMER (RCN-T)	Time until the count starts after reverse operation

#### ■ Metal connector Connects to the BL-OPC screwdriver

\* The control panel display and some functions of the VZOP-STC differ slightly.

### ● BLOP-STC3 (Rear panel)



#### ■ Terminal block

A	COMP	"Work complete" signal output terminal, open collector output (maximum load rating DC30V/80mA)
B	RESET	Resets the count timer, input terminal for the "work fixed released" signal from external equipment
C	SET	Input terminal for the "work set confirmation" signal
D	GND	—
E	+DC24V	Power supply terminal for external equipment, maximum rating DC24V/0.2A
F	VALVE	Output terminal for external equipment control, open collector output (maximum load rating DC30V/80mA)
G	BZ	Work complete output terminal, open collector output (maximum load rating DC30V/80mA)
H	ER BZ	Warning output open collector output if work is removed before operation is complete (maximum load rating DC30V/80mA)