

Main Specification		
Engine	Type	: Two Stroke, Forced, Air Cooled, Single Cylinder
	Displacement	: 46.5cc, $\Phi 43 \times 32$ mm (Inner bore size $\times$ stroke)
	Fuel Tank Capacity	: 1 liter
	Fuel Mixture Ratio	: 25:1 (gasoline:2 cycle oil)
	Revolution (idling)	: 2700 rpm $\pm$ 250
	Revolution (loaded, impact)	: 7120 rpm
	Revolution (non loaded, max)	: 9880 rpm
Ignition	Type	: Electronic
	Spark Plug Type	: NGK BPMR6A
Carburetor	Type	: Diaphragm
Impact	Square Driver Size	: 25.4mm (1")
	Fastening Torque Range	: 1700 N.m (Full Throttle: 1255 ft.lbf) : 950 N.m (Half Throttle: 701 ft.lbf)
	Free Speed	: 1200 rpm
Capacity	Bolt Diameter	: 32mm (1 1/4")
Weight	Without fuel	: 19.50kg (42.99 lbs)

**"Yellow Guppy" Carrying Case**



**No.3500 GP**  
W450mm  $\times$  L920mm  $\times$  H430mm  
Weight : 6kg (Case only)

Details are described in separate instruction manuals.

Manufactured by:  
**VESSEL CO., INC.**

17-25, Fukae-Kita 2-chome,  
Higashinari-ku, Osaka 537-0001 Japan  
Tel : +81 6 6976 7778 Fax : +81 6 6972 9441  
E-mail : [export@vessel.co.jp](mailto:export@vessel.co.jp)  
URL : <http://www.vessel.jp>

Distributed by

10020521.01  
Printed in Japan

**VESSEL**  
Quality does it.

# GASOLINE ENGINE IMPACT WRENCH

Pick up and work alone!

Model No.  
**GT-3500GE**  
(EDP No.338510)

**Portable!**

Approved by EMISSION CONTROL Directive 2002/88/EC, 97/68/EC.



Product of Japan




# PHANTOM! PORTABLE GASOLINE ENGINE IMPACT WRENCH

**Going Everywhere, No Electricity,  
No Air Power, No Motor, etc.**

**VESSEL**  
Quality does it.

**Model No.  
GT-3500GE**  
(EDP No.338510)

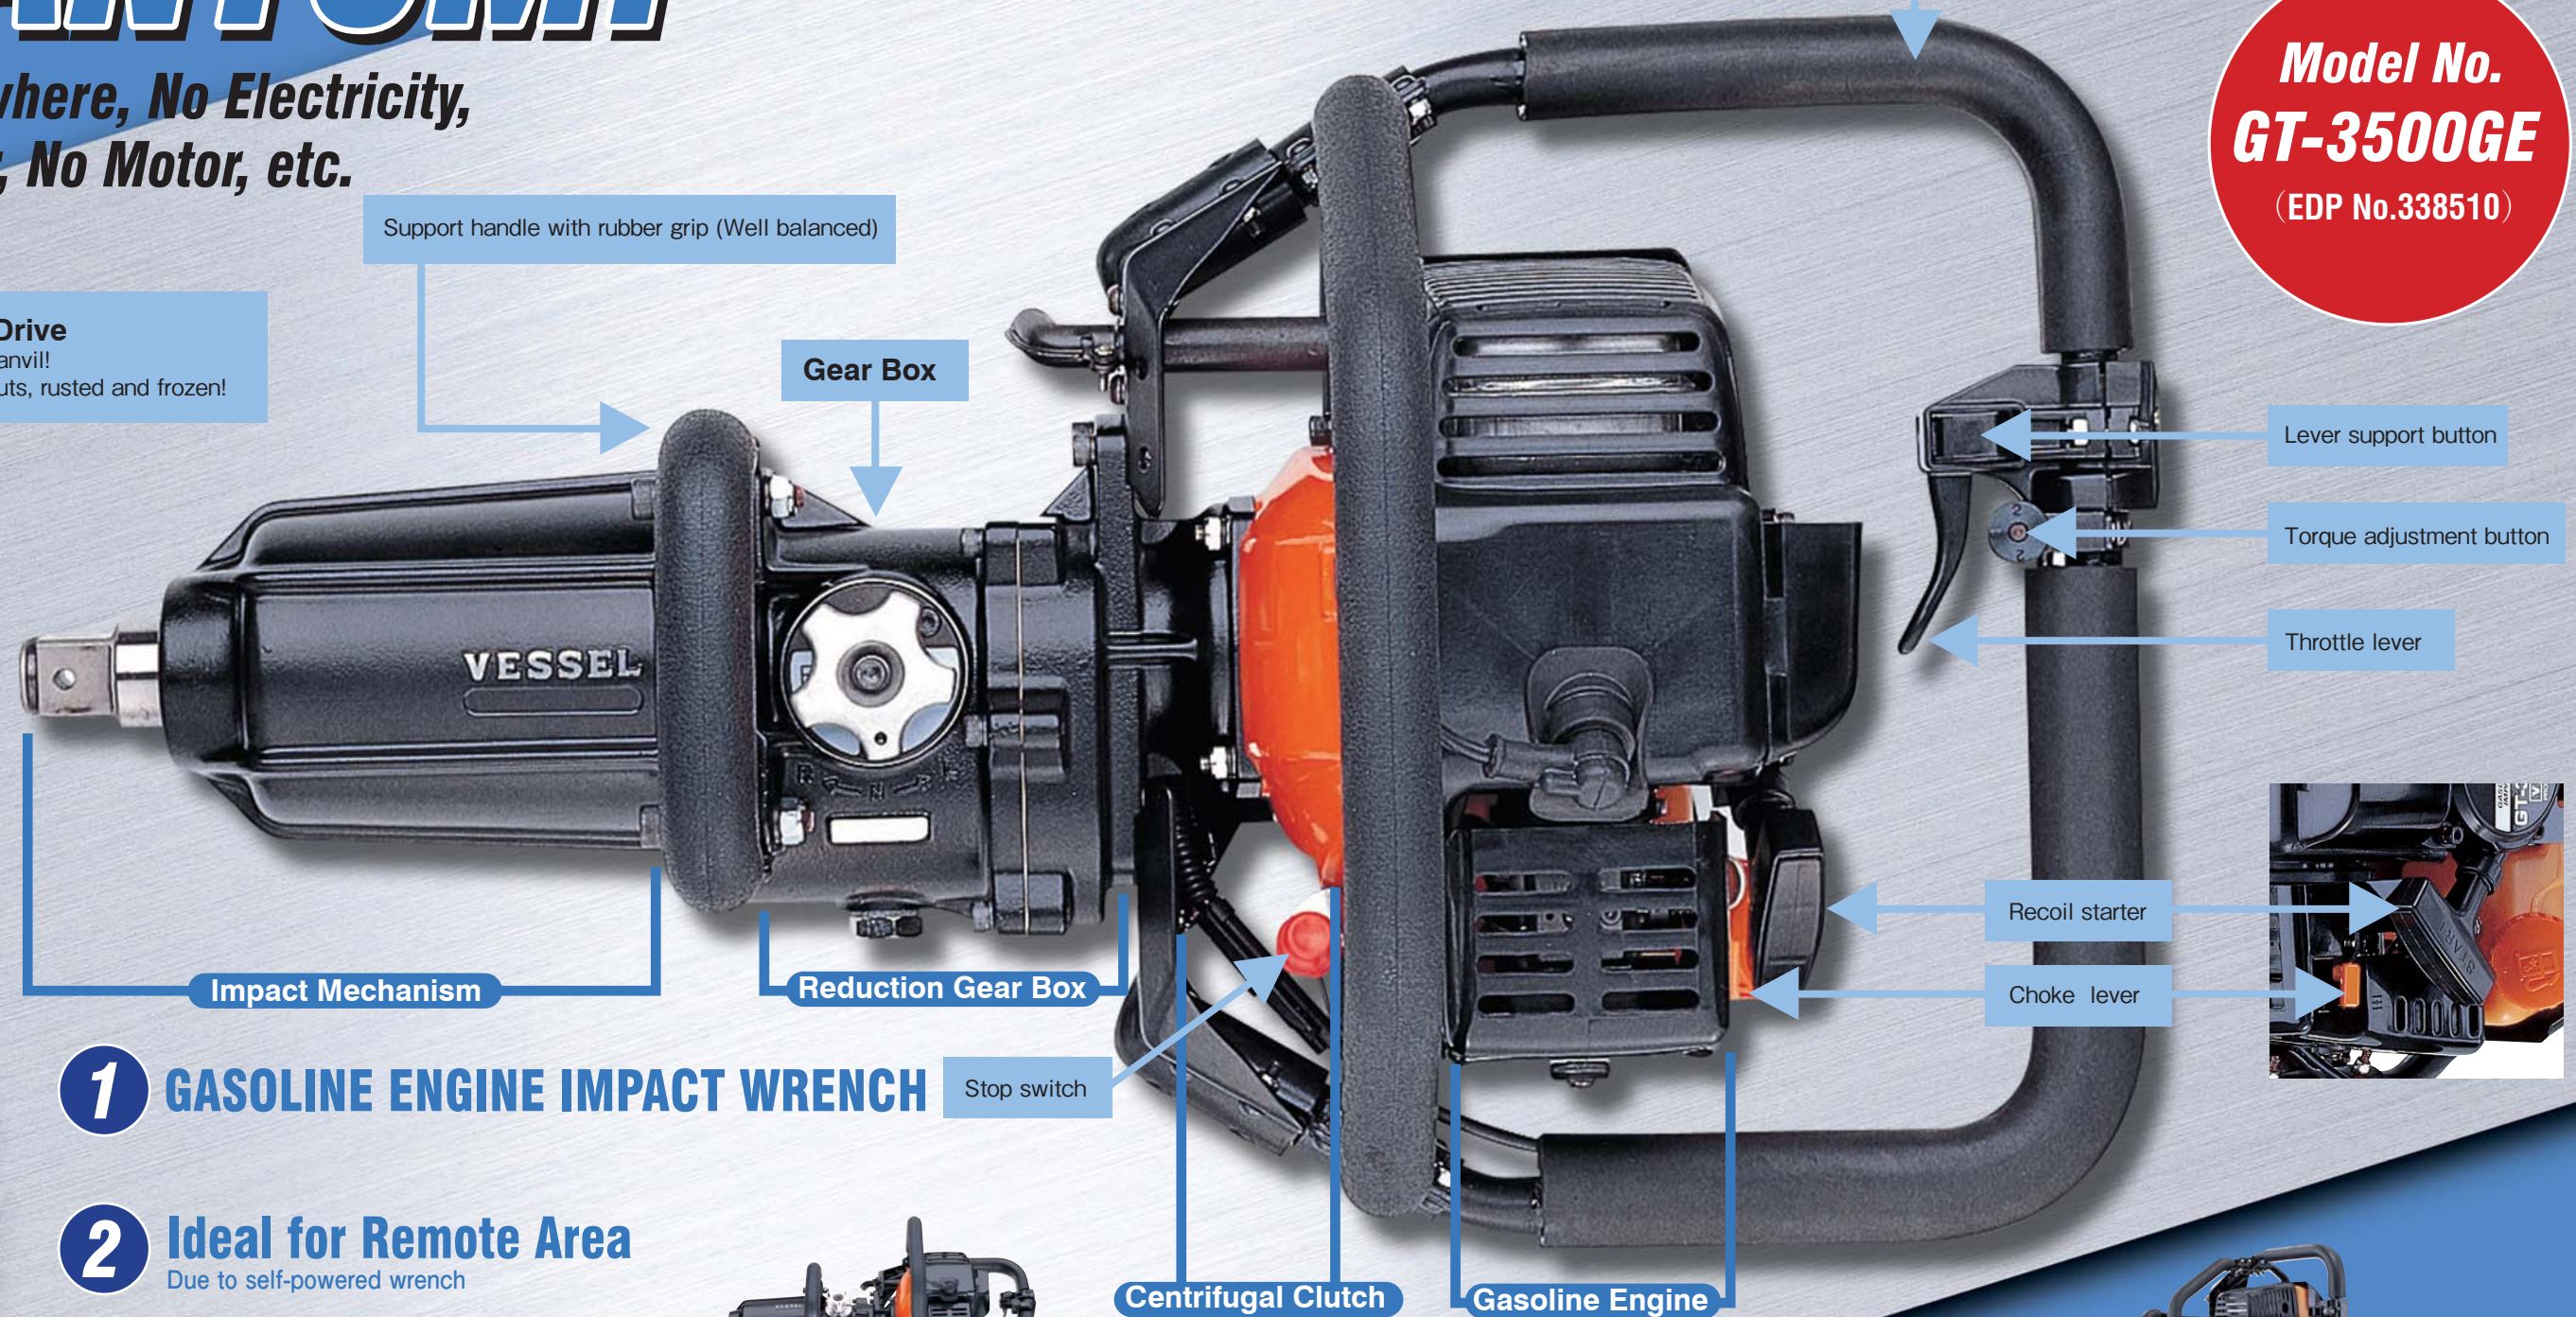

**1 GASOLINE ENGINE IMPACT WRENCH**

**2 Ideal for Remote Area**  
Due to self-powered wrench

**3 Emergency**

**4 Only 19.5kg!**  
Easy to carry it away.  
Max Torque Fastening



## Create The New Market!